


Vacuum Filters and Mufflers



ANVER CVM Series

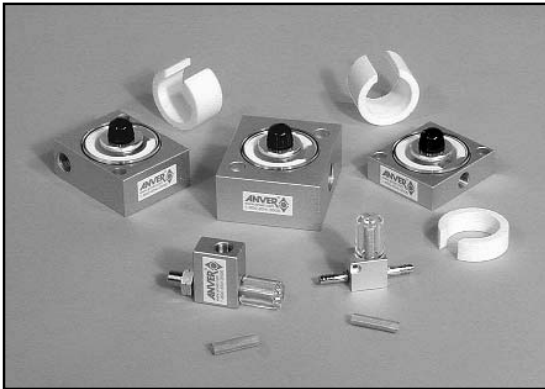


Replacement Vacuum Filters

Popular Style Replacement Vacuum Filters now with even Lower Prices! A great value for top quality replacement filters without paying for the name brand price.

Media: Non-Corrosive Air
 Operating Vacuum: 0 to -960 mbar
 Maximum Pressure: 5 bar
 Operating Temperature: 32° to 140° F (0 to 60° C)
 Filtration: 120 µm (C-VF2)
 130 µm (C-VF3, C-VF-5, C-VF-6)

ANVER Item No.	For Ejector	Male Connector	Material Housing	Material Filter Element	Inner Volume in. ³ (cm ³)	Weight oz. (g)	Replacement Filter Element
C-VF2	CV-05,-10 MCA-05	G 1/8"	Aluminum	Acrylic, SS	0.21 (3.5)	1.59 (45)	C-VF2E
C-VF3	CV-05,-10 MCA-05	G 1/8"	Aluminum	PC, Polyvinyl	0.79 (13)	3.17 (90)	C-VF3E
C-VF5	CV-15 MCA-10/13	G 1/4"	Aluminum	PC, Polyvinyl	1.43 (23.5)	5.29 (150)	C-VF5E
C-VF6	CV-20	G 3/8"	Aluminum	PC, Polyvinyl	2.01 (33)	8.29 (235)	C-VF6E

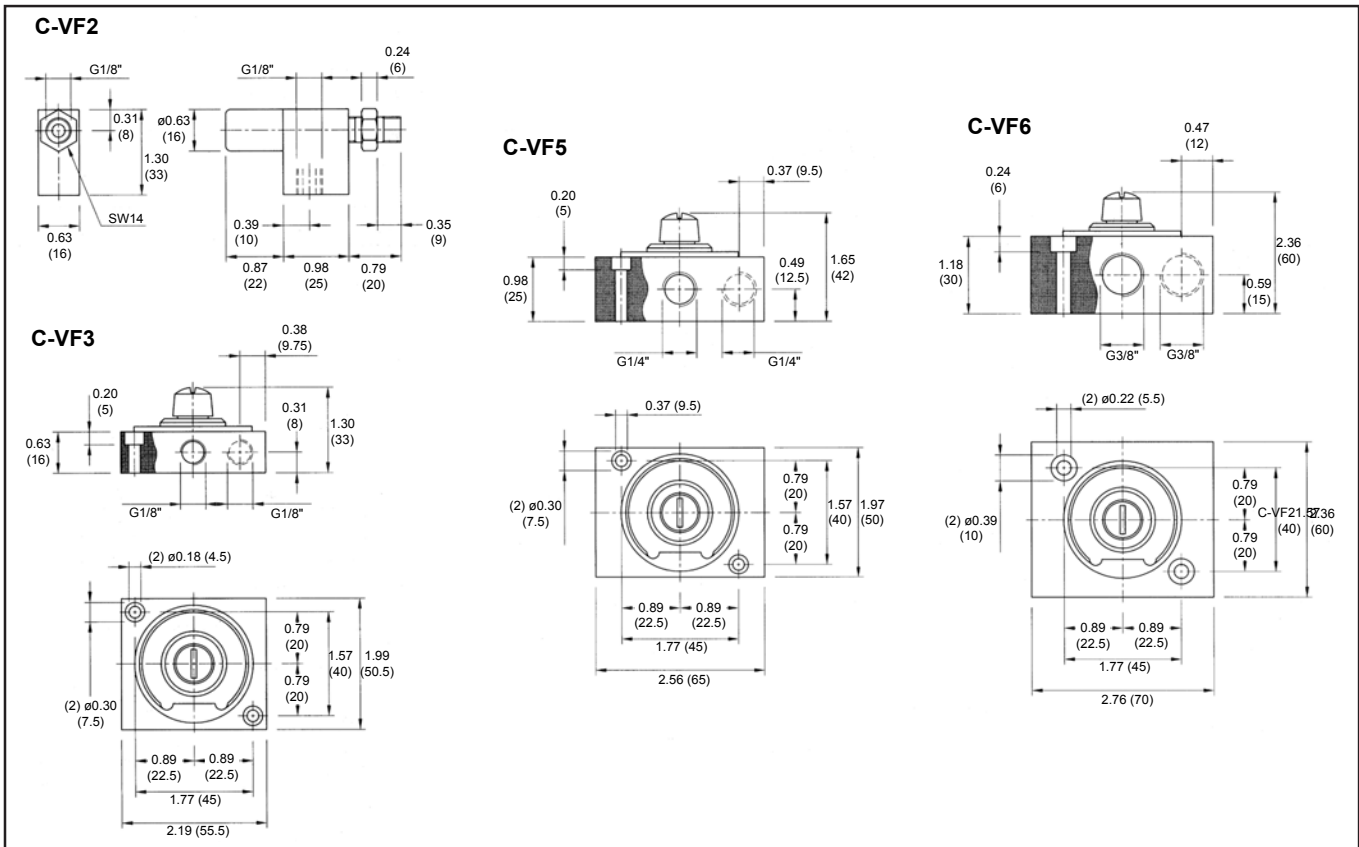

► This spec sheet was adapted for print from our website. Additional information and photos are available at www.anver.com. 9040201