



### Sleeve Valves for Vacuum or Pressure Applications

#### Features


- Anodized Aluminum Sleeve for long life
- Chrome Plated Brass Body for corrosion resistance
- Finger Tip ON/OFF Control
- Smooth, but not loose, transition

#### Applications:

ANVER Slide Valves are manually controlled 3-Way functioning valves that vent the downstream vacuum or pressure when in the OFF position, providing a simple, effective means of controlling the vacuum or pressure generation. These slide valves have been field proven for long life and maintenance free operation and are ideal for use where intermittent vacuum or pressure control by the operator is required.

#### Vacuum Slide Valve Specifications:

Max. Pressure: 150 psi (10 bar)  
 Max. Vacuum: 29 in. Hg (980 mbar)  
 Temperature: 0° to 160°F  
 (-18°C - +70°C)

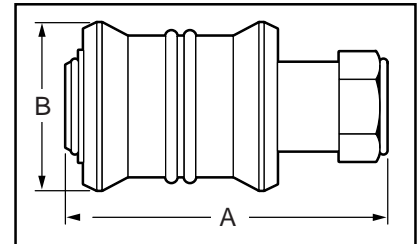

ANVER Item No.	Thread Female	A in. (mm)	B in. (mm)
SV-18	1/8" NPTF	1.89 (48)	0.98 (25)
SV-14	1/4" NPTF	2.28 (58)	1.18 (30)
SV-38	3/8" NPTF	2.75 (70)	1.38 (35)
SV-12	1/2" NPTF	3.15 (80)	1.57 (40)
SV-12BL	1/2" NPTF	3.15 (80)	1.57 (40)