

# VP128 Foam Vacuum Pads


*For Rough, Uneven, Rigid Surfaces*

13200410

Control Number: 042506B




- Features an A2B7 Neoprene rubber slip-on seal with a soft foam ribbed extrusion sealing edge which conforms to rough and/or uneven surfaces.
- The pad base is welded structural steel construction.
- The pad features a special two part seal.
- Seal diameter: 11.5" (292 mm)
- Available in three mounting arrangements.
- A2B7 black foam is standard. Other foam styles available. Consult Factory.




A2B7 Seal

## VP128C Clevis Mount Suspension Series

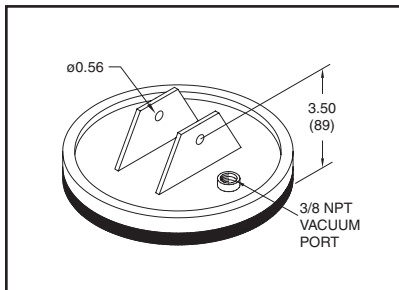


Pad Number	Seal Number	Weight lb (kg)	Horizontal Rated Load lb (kg)	Vertical Rated Load lb (kg)
VP128C-A2B7	24500713	13 (5.9)	300 (136 kg)	N/A

## VP128Q Quad Mount Suspension Series

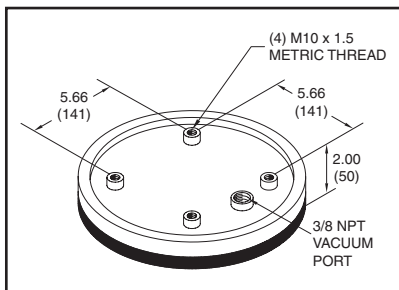

Pad Number	Seal Number	Weight lb (kg)	Horizontal Rated Load lb (kg)	Vertical Rated Load lb (kg)
VP128Q-A2B7	24500713	11 (5.0)	300 (136 kg)	150 (68 kg)

## VP128S Ball Swivel Suspension Series

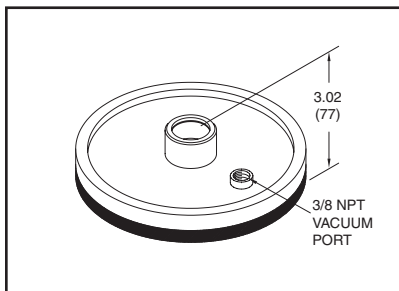

Pad Number	Seal Number	Weight lb (kg)	Horizontal Rated Load lb (kg)	Vertical Rated Load lb (kg)
VP128S-A2B7	24500713	12 (5.5)	300 (136 kg)	N/A

**NOTE:** The cup capacities shown above are based on 22"Hg at sea level with a safety factor of two (2) in the horizontal (flat), and four (4) in the vertical (upright) on vacuum holding.